









Guardrails		
Pedestrian Guardrail		<ul style="list-style-type: none"> > Manufactured to BS 7818:1995 > Class 1 or 2 available > Hot Dip galvanised to BS EN ISO 1461:2022 > Panels Available with or without sight gap > Straight or Staggered infill bars available > 2 and 1 meter panels kept in stock > Powder coating and Painted finish available
Offroad Barrier		<ul style="list-style-type: none"> > Easy to install modular system. > Hot Dip galvanised to BS EN ISO 1461:2022 > Full range of accessories to facilitate site constraints. > Available single height and double height.
Work Zone Protection		
Traffic Barriers		<ul style="list-style-type: none"> > Conforms to BS EN 8442, Chapter 8, Red book 2013 and Traffic Signs Regulations & General Directions. > Reflectivity requirements of BS EN 12899-1 > Free standing with 360° swivel feet > Anti-Trip Feet > Moulded in Orange, but can be coloured to suit
Traffic Cones		<ul style="list-style-type: none"> > Conforms to BS EN 13422, Chapter 8, Red Book 2013 and Traffic Signs Regulations and General Directions. > Blow moulded top with easy grip access > Fitted with high performance Starlux® pocketed prismatic sleeve, offering superb daylight luminance and night time reflectivity.
Temporary fencing		<ul style="list-style-type: none"> > Lightweight design, allowing for easy installation and storage. > Available with a wide range of accessories allowing for installation even in difficult terrain.
Crowd Barrier		<ul style="list-style-type: none"> > Solid construction ensures its long-term use > Wide base, ensuring stability > Easy assembly > Special hooks guarantee the safety of use and prevent unauthorized opening of the barriers.
Work Signs		<ul style="list-style-type: none"> > Conforms to BS EN 8442:2015, Chapter 8, The Red Book 2013 and Traffic Signs Regulations and General Directions. > Long life due to strong and robust design. > Excellent weight and footprint stability > Easy and safe to handle. > Stackable for Storage and transport.
Trench Covers		<ul style="list-style-type: none"> > 100% recyclable. > high impact resistance does not shatter. > Anti-Slip pattern. > Handles for easy lifting, single man lift. > High visible. > Various styles available. > Conforms to National Grid Y/SP/E/42, HAUC advice Note No. 2018/01 and The Red book 2013

Client: Saferoad

Submission Date: 02/11/2023

Revision 02 Date:


Reference No: **SAFE03-01-01**
***Please quote this Number with Order.**

Product: Tuff Tread

Cust. Request: Yellow
Matched Pantone: UU Yellow

Description:

- Cover embossed with Saferoad.

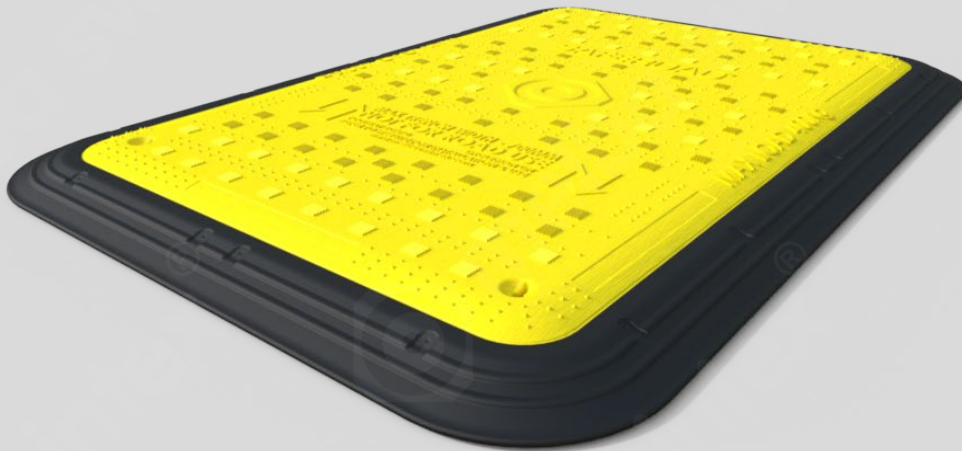

Click For More

Please attach signed confirmation of artwork to any orders placed or quote Reference Number: **SAFE03-01-01**

Signed: _____

Date: _____

The exact shade of colour must be confirmed at approval stage

Inking of Embossing requires a deeper plate than standard & is not permanent. Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad

Submission Date: 02/11/2023

Revision 02 Date:

Reference No: **SAFE03-01-02**
***Please quote this Number with Order.**


Product: Driveway Board

Cust. Request: Yellow

Matched Pantone: UU Yellow

Description:

- Cover embossed with Saferoad.

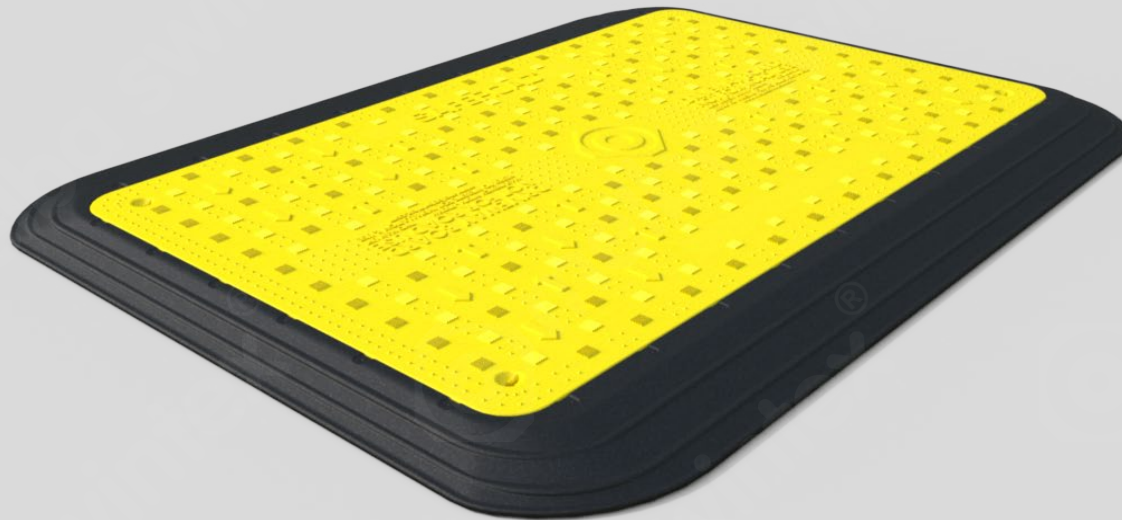

Click For More

Please attach signed confirmation of artwork to any orders placed or quote Reference Number: **SAFE03-01-02**

Signed: _____

Date: _____

The exact shade of colour must be confirmed at approval stage

Inking of Embossing requires a deeper plate than standard & is not permanent. Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad

Submission Date: 02/11/2023

Revision 02 Date:

Reference No: **SAFE03-01-03**
***Please quote this Number with Order.**

Product: 75cm Mastercone

Cust. Request: Standard Colours

Matched Pantone: Standard Colours

Description:

- Base embossed with Saferoad.



Please attach signed confirmation of artwork to any orders placed or quote Reference Number: **SAFE03-01-03**

Signed: _____

Date: _____

The exact shade of colour must be confirmed at approval stage



Click For More

Inking of Embossing requires a deeper plate than standard & is not permanent. Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad

Submission Date: 02/11/2023

Revision 02 Date:

Reference No: **SAFE03-01-04**
***Please quote this Number with Order.**

Product: Q-Sign Range

Cust. Request: Standard Colours

Matched Pantone: Standard Colours

Description:

- Sign branded down one side with Saferoad.



Please attach signed confirmation of artwork to any orders placed or quote Reference Number: **SAFE03-01-04**

Signed: _____

Date: _____

The exact shade of colour must be confirmed at approval stage



Click For More

Inking of Embossing requires a deeper plate than standard & is not permanent. Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.