


D 00E0710ZLE

**REGULATIONS:**

WELDING QUALITY LEVEL ACC. TO: EN ISO 5817 class C  
 NO SHARP EDGES IS ALLOWED  
 HOT DIP GALVANISING ACC. TO: EN ISO 1461  
 Local coating thickness min. 60 µm  
 Mean coating thickness min. 70 µm

No	Qty	Revision note	Date	Inf.	Appr.
A		RADIUS	2006-01-27		GLN
B	1	TEST INSTRUCTIONS INSERTED	2006-09-01		SFM
C	1	TEST INSTRUCTIONS CHANGED	2013-01-30		GLN
D	1	RADIUS	2017-12-04		MWN

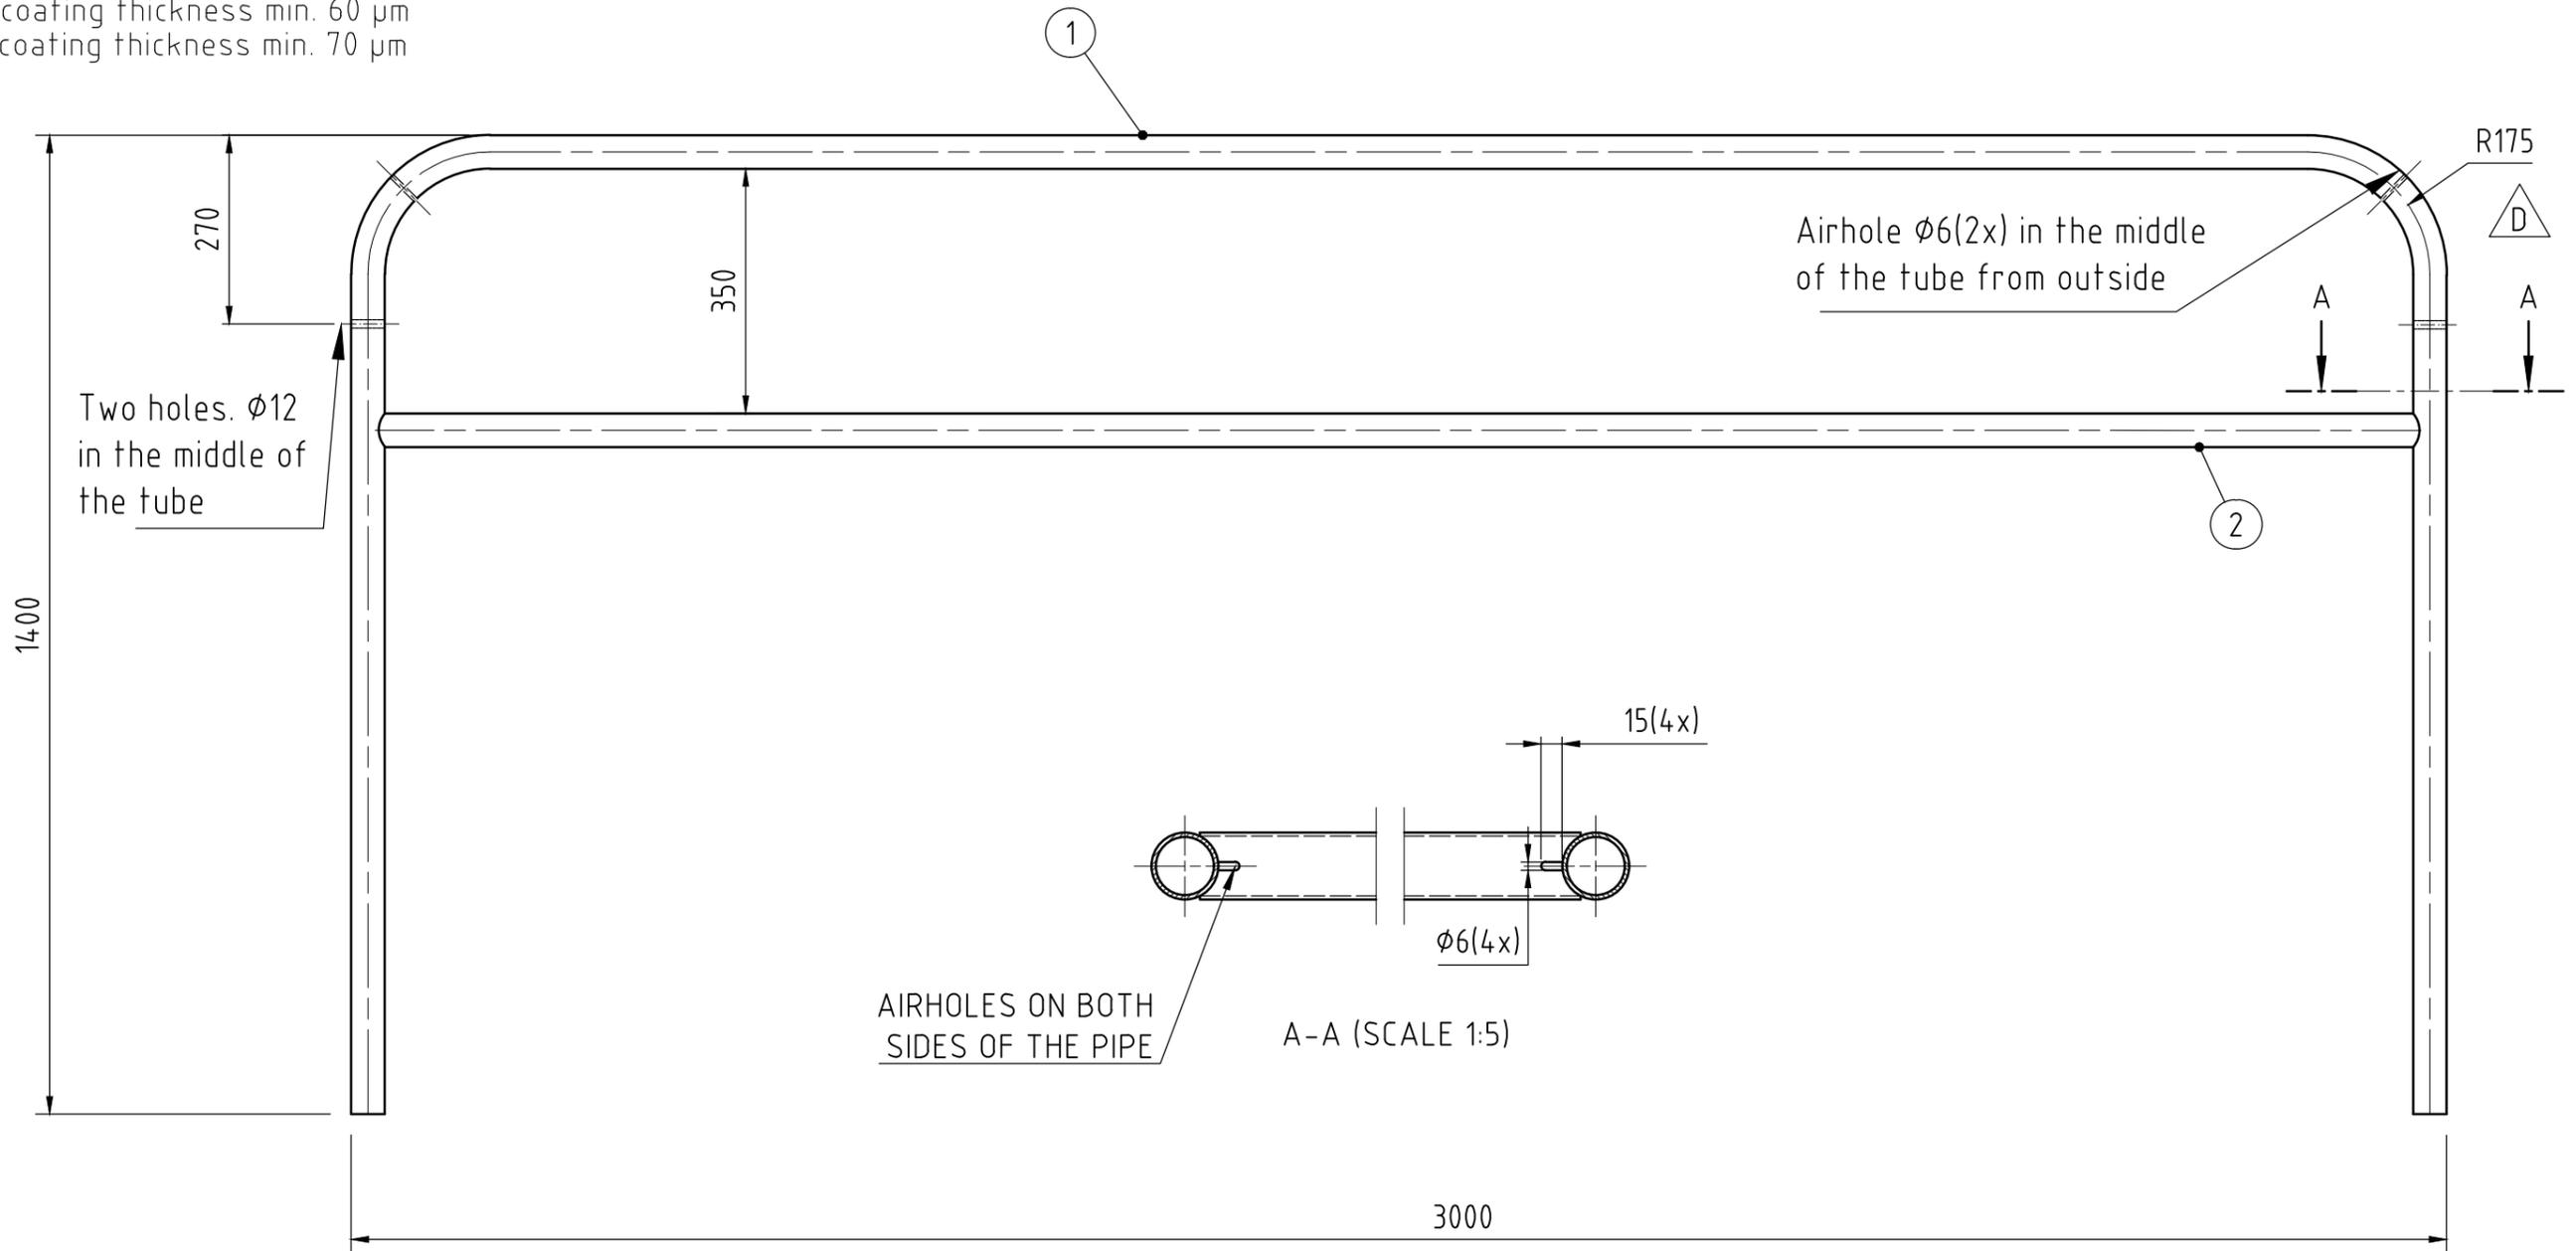

TEST CLEARANCE AFTER  
 HOT DIP GALVANIZE

- HOLE  $\phi$  12      MIN  $\phi$  11,5

1	1	TUBE	S235JRG2	$\phi$ 48x3,2	Approx. L=5570
2	1	TUBE	S235JRG2	$\phi$ 48x3.2	L=2911
Det.nr	Ant.	Beskrivning	Material	Ämne	Anmärkning
<b>DETAIL DRAWING</b>					
Design.	DRAWN	Copied	Checked	Stand.	Appr.
	RFS	A3	AKN		
Scale			Replaces		
1:10					
Replaced by				Date	
SAFEROAD®				2005-10-24	
STANDARD FENCE BL 20				33,3 Kg	
TYP 140 / 300				Drawing no	
				3120140300	
				Rev	
				D	