

08	12/01/23	M10 x 45 BOLT AMENDMENTS	н.в
07	13/05/22	SURFACE MOUNTED POST BASE CHANGED	A.D
06	27/05/21	DETAILS REVISED	M.T
05	19/11/19	BEAM DETAILS ADDED	M,T
04	12/02/19	TITLEBLOCK REVISED	М.Т
03	10/03/17	OFFSET POST REVISED	L.L
02	01/02/17	DETAILS REVISED	브
1.3	20/05/15	DETAILS REVISED	м.т
REVn	DATE	DETAILS	INITIAL

MegaRail ec3.3 H1 W3 (VI4)

H1.W3 VEHICLE RESTRAINT SYSTEM COMPONENTS SCHEMATIC

SAFEROAD


CONCORD HOUSE, BESSEMER WAY, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8XE t: 01724 289119 e: john.cudlipp@saferoad.co.uk

DRAWING NUMBER:

REVn:


H1W3-GA-00


80

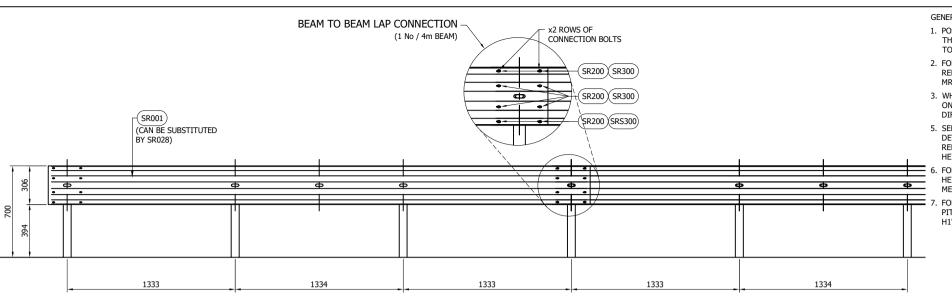

GENERAL NOTES:

- 1. POSTS ARE TO BE INSTALLED WITH THE CLOSED FACE OF THE CHANNEL TOWARDS THE ON-COMING TRAFFIC.
- 2. FOR OPTIONS ON POST FOUNDATIONS REFER TO DRAWING NUMBER MR-GA-020
- 3. WHEN TYING INTO ADJACENT VRS ONLY ONE WORKING WIDTH DIFFERENCE IS PERMITTED.
- 5. SEE MR-GA-001 & MR-GA-003 FOR DETAILS OF SYSTEM HEIGHT WITH REFERENCE TO SETBACK & KERB HEIGHT
- 6. FOR MINIMUM LENGTH OF FULL HEIGHT VRS REFER TO SAFEROAD MEGARAIL MANUAL.
- FOR DEVIATIONS IN SYSTEM POST PITCH REFER TO DRAWING H1W4-GA-40.

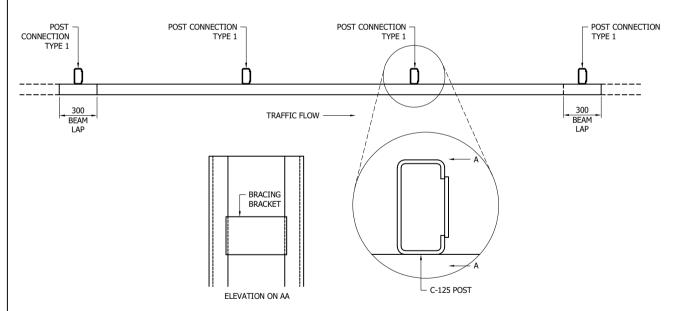



BEAM DETAILS ADDED

TITLEBLOCK REVISED

DETAILS REVISED

DETAILS REVISED

04 19/11/19

03 12/02/19

01/02/17

1.3 20/05/15

MegaRail ec3.3 H1 W3 (VI4)

H1.W3 VEHICLE RESTRAINT SYSTEM ASSEMBLY & SETTING OUT ARRANGEMENT

SAFEROAD

CONCORD HOUSE, BESSEMER WAY, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8XE t: 01724 289119

REVn:

04

e: john.cudlipp@saferoad.co.uk

DRAWING NUMBER:

M.T

M.T


L.L

M.T

H1W3-GA-01

TABLE 'A' - SYSTEM COMPONENT SCHEDULE - QUANTITIES / 4m BEAM SAFEROAD UK PART QUANTITY DESCRIPTION NUMBER BEAM "A" PROFILE (CAN BE SUBSTITUTED BY SR001 SR028) POST "C" 125 c/w BRACKET 3 SEE TABLE 'B' FOR SCHEDULE OF BOLTED CONNECTIONS REFER TO DRAWING NUMBER H1W3-GA-02


TABLE 'B' - SCHEDULE OF POST REFERENCE NUMBERS AND LENGTHS			
SAFEROAD UK PART NUMBER	POST LENGTH		
SR049	1100		
SR047	1800		
SR048	2000		
SR037	2400		



BEAM TO BEAM CONNECTION ARRANGEMENT (x2 LOCATIONS / BEAM END)

BOLTING COMPONENT SCHEDULE - QUANTITIES / BEAM			S / BEAM
	SAFEROAD UK PART NUMBER	DESCRIPTION	BEAM TO BEAM CONNECTION
	SR200	SETSCREW 4.6 LIP M16x27 c/w NUT	8 (+8)
	SR300	WASHER M16 18¢ HOLE	8 (+8)

^{**} BEAM REFERENCES i.e. LEFT / RIGHT HAND ARE FOR VERGE INSTALLATIONS; FOR CENTRAL RESERVATION INSTALLATIONS THE REFERENCES ARE REVERSED



BEAM TO POST CONNECTION TYPE 1

BOLTING COMPONENT SCHEDULE - QUANTITIES / POST		
SAFEROAD UK PART NUMBER	DESCRIPTION	TYPE 1 CONNECTION
SR124	SETSCREW 8.8 M10 x 45 c/w NUT	1
SR152	WASHER PLATE 115 x 40 x 5 DIA. 12	1
SR301	M10 WASHER 11¢ HOLE	1
	QUANTITY OF CONNECTION TYPES / 4m BEAM	
		3 (+1)

GENERAL NOTES:

NUMBERS IN THE SCHEDULES SUFFIXED (+)
DENOTES THE ADDITIONAL QUANTITY OF
COMPONENTS REQUIRED FOR EXTREME ENDS
OF INDIVIDUAL RUNS OF BARRIER.

05	12/01/23	M10 x 45 BOLT AMENDMENTS	н,в
04	26/05/21	NOTES REVISED	М.Т
03	12/02/19	DETAILS REVISED	M.T
02	01/02/17	DETAILS REVISED	L.L
1.3	20/05/15	NOTES REVISED	M.T
REVn	DATE	DETAILS	INITIAL

MegaRail ec3.3 H1 W3 (VI4)

H1.W3 VEHICLE RESTRAINT SYSTEM BOLTING ARRANGEMENTS

SAFEROAD[®]


CONCORD HOUSE,
BESSEMER WAY, SCUNTHORPE,
NORTH LINCOLNSHIRE, DN15 8XE
t: 01724 289119
e: john.cudlipp@saferoad.co.uk


DRAWING NUMBER:

REV

H1W3-GA-02

05

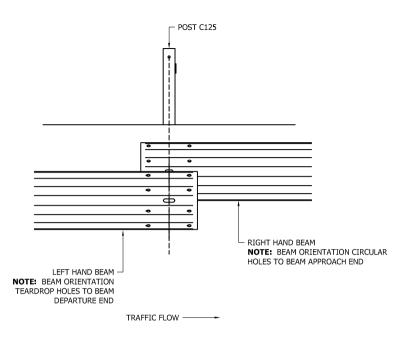

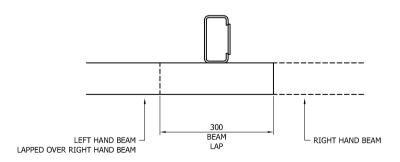

GENERAL NOTES:

 POSTS ARE TO BE INSTALLED WITH THE CLOSED FACE OF THE CHANNEL TOWARDS THE ON-COMING TRAFFIC.

03	12/02/19	TITLEBLOCK REVISED	M.T
02	01/02/17	DETAILS REVISED	L.L
1.3	20/05/15	REVn BOX ADDED	M.T
REVn	DATE	DETAILS	INITIAL

MegaRail ec3.3 H1 W3 (VI4)

H1.W3 VEHICLE RESTRAINT SYSTEM BEAM LAPPING DETAIL FOR H1 A W3 MEGARAIL SYSTEM

SAFEROAD®

CONCORD HOUSE,
BESSEMER WAY, SCUNTHORPE,
NORTH LINCOLNSHIRE, DN15 8XE
t: 01724 289119
e: john.cudlipp@saferoad.co.uk


DRAWING NUMBER:

REVn:

H1W3-GA-03

03

^{**} BEAM REFERENCES i.e. LEFT / RIGHT HAND ARE FOR VERGE INSTALLATIONS; FOR CENTRAL RESERVATION INSTALLATIONS THE REFERENCES ARE REVERSED

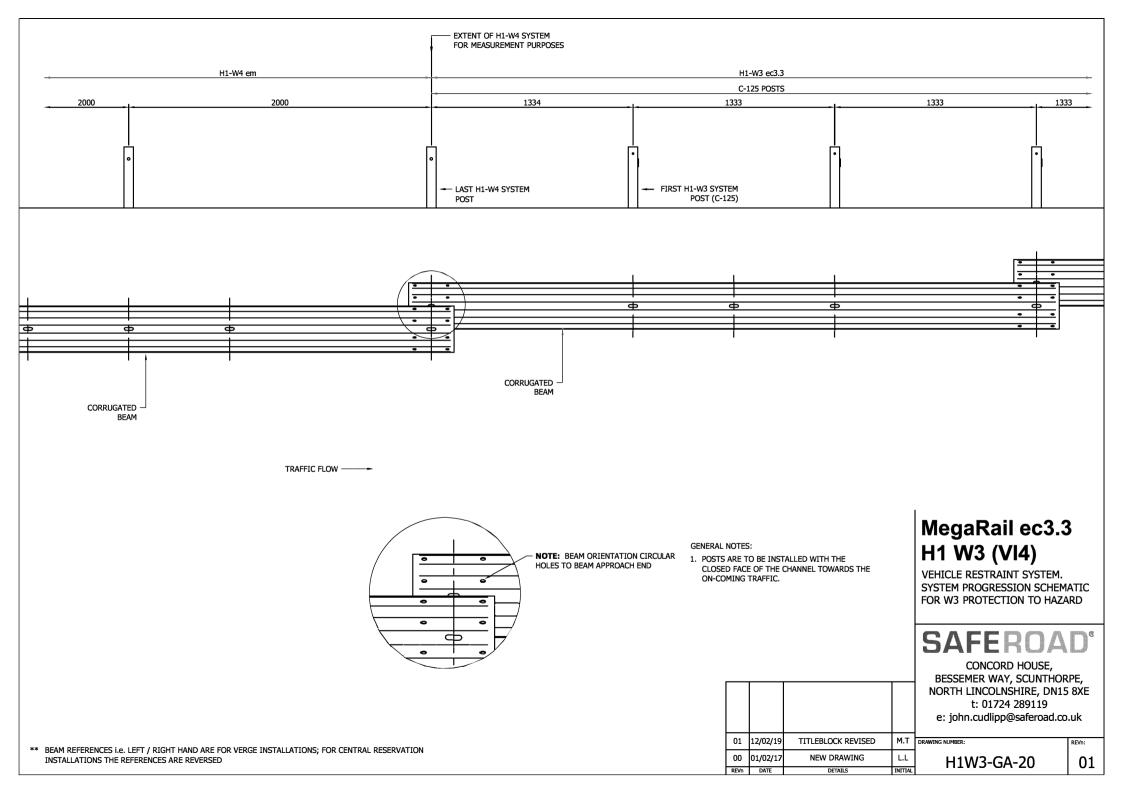

GENERAL NOTES: 1. IF THE SITE CONDITIONS DO NOT ALLOW A POST TO BE INSTALLED ON THE SYSTEM PITCH DEVIATIONS CAN BE APPLIED. THE OBSTRUCTED POST CAN BE LEFT OUT AND EXTRA POSTS INSTALLED TO SPAN THE OBSTRUCTION. THE NEW POST SPACING MUST NOT EXCEED 3000mm AND MUST NOT BE LESS THAN 500mm. ALTHOUGH IT WOULD BE BENEFICIAL TO USE THE HOLES ALREADY IN THE BEAM IT IS ACCEPTABLE TO DRILL NEW HOLES IN THE DESIRED POSITIONS AND TREAT WITH ZINC RICH PAINT. OFFSET POSTS SHOWN ON DRAWING H1W3-GA-00 CAN BE USED. **OBSTRUCTION** 1333 500 MIN. MAX. 3000 500 MIN. SURFACE MOUNTED POST BASE CHANGED SURFACE MOUNTED POST A.D 13/05/22 23/07/21 SURFACE TICS DETAIL ADDED 05 A.D M.T 25/05/21 NOTES REVISED **OBSTRUCTION** 03 12/02/19 M.T TITLEBLOCK REVISED M.T 02 17/10/18 **DETAILS REVISED** NOTES REVISED L.L 01 10/03/17 1333 500 MIN. MAX. 3000 1333 01/02/17 **NEW DRAWING** REVn DATE INITIAL DETAILS MegaRail ec3.3 1333 1333 1333 1333 1333 H1 W3 (VI4) H1.W3 VEHICLE RESTRAINT SYSTEM Ф Ф Ф Ф **DEVIATION SETTING OUT ARRANGEMENT SAFEROAD®** CONCORD HOUSE, PUSHED IN DRILL & FIX BESSEMER WAY, SCUNTHORPE, CRADLE ANCHOR OBSTRUCTION OR PUSHED IN NORTH LINCOLNSHIRE, DN15 8XE **ANCHOR** t: 01724 289119 e: john.cudlipp@saferoad.co.uk DRAWING NUMBER: REVn: H1W3-GA-40 06