









Guardrails		
Pedestrian Guardrail		<ul style="list-style-type: none"> <li>&gt; Manufactured to BS 7818:1995</li> <li>&gt; Class 1 or 2 available</li> <li>&gt; Hot Dip galvanised to BS EN ISO 1461:2022</li> <li>&gt; Panels Available with or without sight gap</li> <li>&gt; Straight or Staggered infill bars available</li> <li>&gt; 2 and 1 meter panels kept in stock</li> <li>&gt; Powder coating and Painted finish available</li> </ul>
Offroad Barrier		<ul style="list-style-type: none"> <li>&gt; Easy to install modular system.</li> <li>&gt; Hot Dip galvanised to BS EN ISO 1461:2022</li> <li>&gt; Full range of accessories to facilitate site constraints.</li> <li>&gt; Available single height and double height.</li> </ul>
Work Zone Protection		
Traffic Barriers		<ul style="list-style-type: none"> <li>&gt; Conforms to BS EN 8442, Chapter 8, Red book 2013 and Traffic Signs Regulations &amp; General Directions.</li> <li>&gt; Reflectivity requirements of BS EN 12899-1</li> <li>&gt; Free standing with 360° swivel feet</li> <li>&gt; Anti-Trip Feet</li> <li>&gt; Moulded in Orange, but can be coloured to suit</li> </ul>
Traffic Cones		<ul style="list-style-type: none"> <li>&gt; Conforms to BS EN 13422, Chapter 8, Red Book 2013 and Traffic Signs Regulations and General Directions.</li> <li>&gt; Blow moulded top with easy grip access</li> <li>&gt; Fitted with high performance Starlux® pocketed prismatic sleeve, offering superb daylight luminance and night time reflectivity.</li> </ul>
Temporary fencing		<ul style="list-style-type: none"> <li>&gt; Lightweight design, allowing for easy installation and storage.</li> <li>&gt; Available with a wide range of accessories allowing for installation even in difficult terrain.</li> </ul>
Crowd Barrier		<ul style="list-style-type: none"> <li>&gt; Solid construction ensures its long-term use</li> <li>&gt; Wide base, ensuring stability</li> <li>&gt; Easy assembly</li> <li>&gt; Special hooks guarantee the safety of use and prevent unauthorized opening of the barriers.</li> </ul>
Work Signs		<ul style="list-style-type: none"> <li>&gt; Conforms to BS EN 8442:2015, Chapter 8, The Red Book 2013 and Traffic Signs Regulations and General Directions.</li> <li>&gt; Long life due to strong and robust design.</li> <li>&gt; Excellent weight and footprint stability</li> <li>&gt; Easy and safe to handle.</li> <li>&gt; Stackable for Storage and transport.</li> </ul>
Trench Covers		<ul style="list-style-type: none"> <li>&gt; 100% recyclable.</li> <li>&gt; high impact resistance does not shatter.</li> <li>&gt; Anti-Slip pattern.</li> <li>&gt; Handles for easy lifting, single man lift.</li> <li>&gt; High visible.</li> <li>&gt; Various styles available.</li> <li>&gt; Conforms to National Grid Y/SP/E/42, HAUC advice Note No. 2018/01 and The Red book 2013</li> </ul>

# Sample Confirmation

Client: Saferoad

Submission Date:

:

:


Product: Tuff Tread

Cust. Request: Yellow

Matched Pantone: UU Yellow

Description:

- Cover embossed with Saferoad.

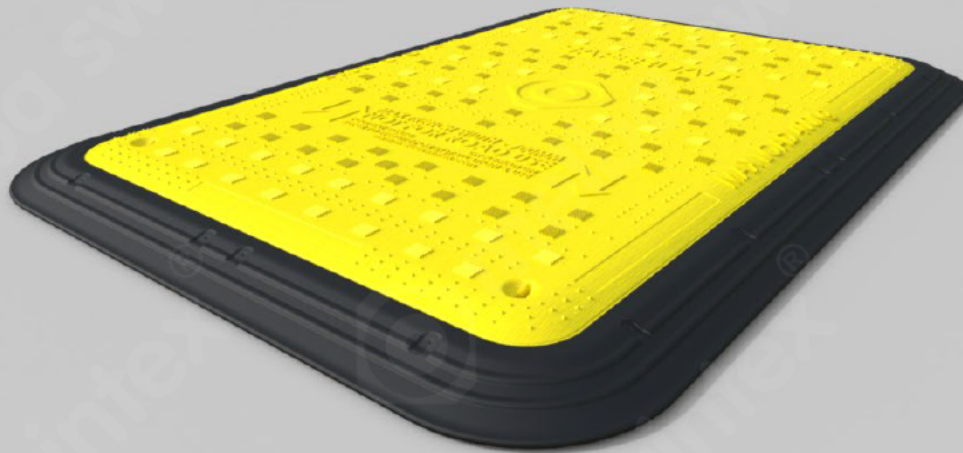

Click For More

Signed:

Date:

The exact shade of colour must be confirmed at approval stage

**Inking of Embossing requires a deeper plate than standard & is not permanent.** Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad


Product: Driveway Board

Cust. Request: Yellow

Matched Pantone: UU Yellow

Description:

- Cover embossed with Saferoad.

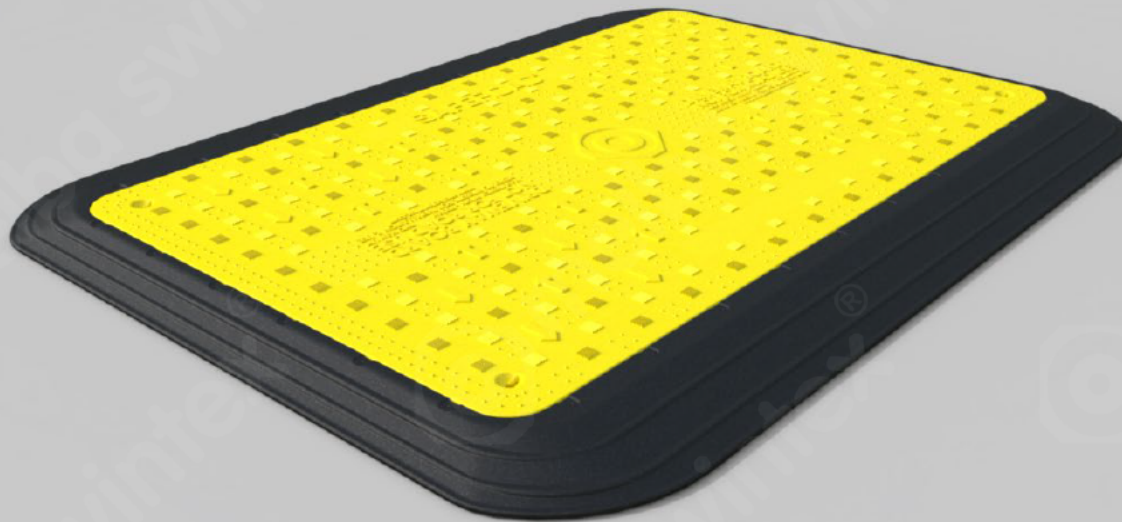

Click For More

Signed: \_\_\_\_\_

Date: \_\_\_\_\_

The exact shade of colour must be confirmed at approval stage

**Inking of Embossing requires a deeper plate than standard & is not permanent.** Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad

Product: 75cm Mastercone

Cust. Request: Standard Colours

Matched Pantone: Standard Colours

Description:

- Base embossed with Saferoad.



Signed: \_\_\_\_\_

Date: \_\_\_\_\_

The exact shade of colour must be confirmed at approval stage

Inking of Embossing requires a deeper plate than standard & is not permanent. Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.

Client: Saferoad

Product: Q-Sign Range

Cust. Request: Standard Colours

Matched Pantone: Standard Colours

**Description:**

- Sign branded down one side with Saferoad.



Click For More

Signed: \_\_\_\_\_

Date: \_\_\_\_\_

The exact shade of colour must be confirmed at approval stage

**Inking of Embossing requires a deeper plate than standard & is not permanent.** Even though every effort is made to achieve the desired colour, due to atmospheric conditions, the precise colour can not always be achieved. Printed Branding is at a resolution of 32 dot-matrix. All Fonts and imagery used for Brand Identity must be confirmed before approval.