


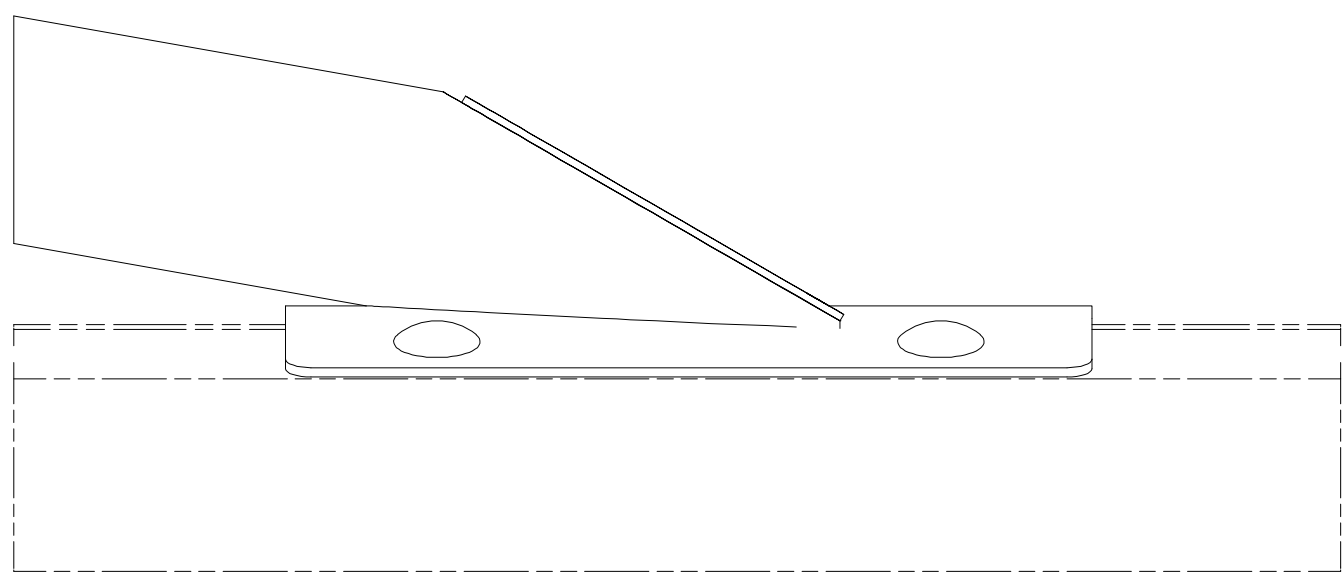
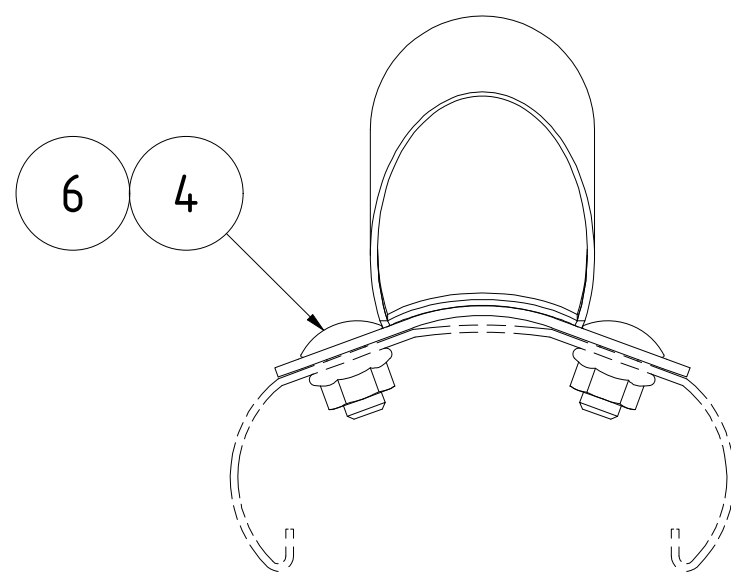
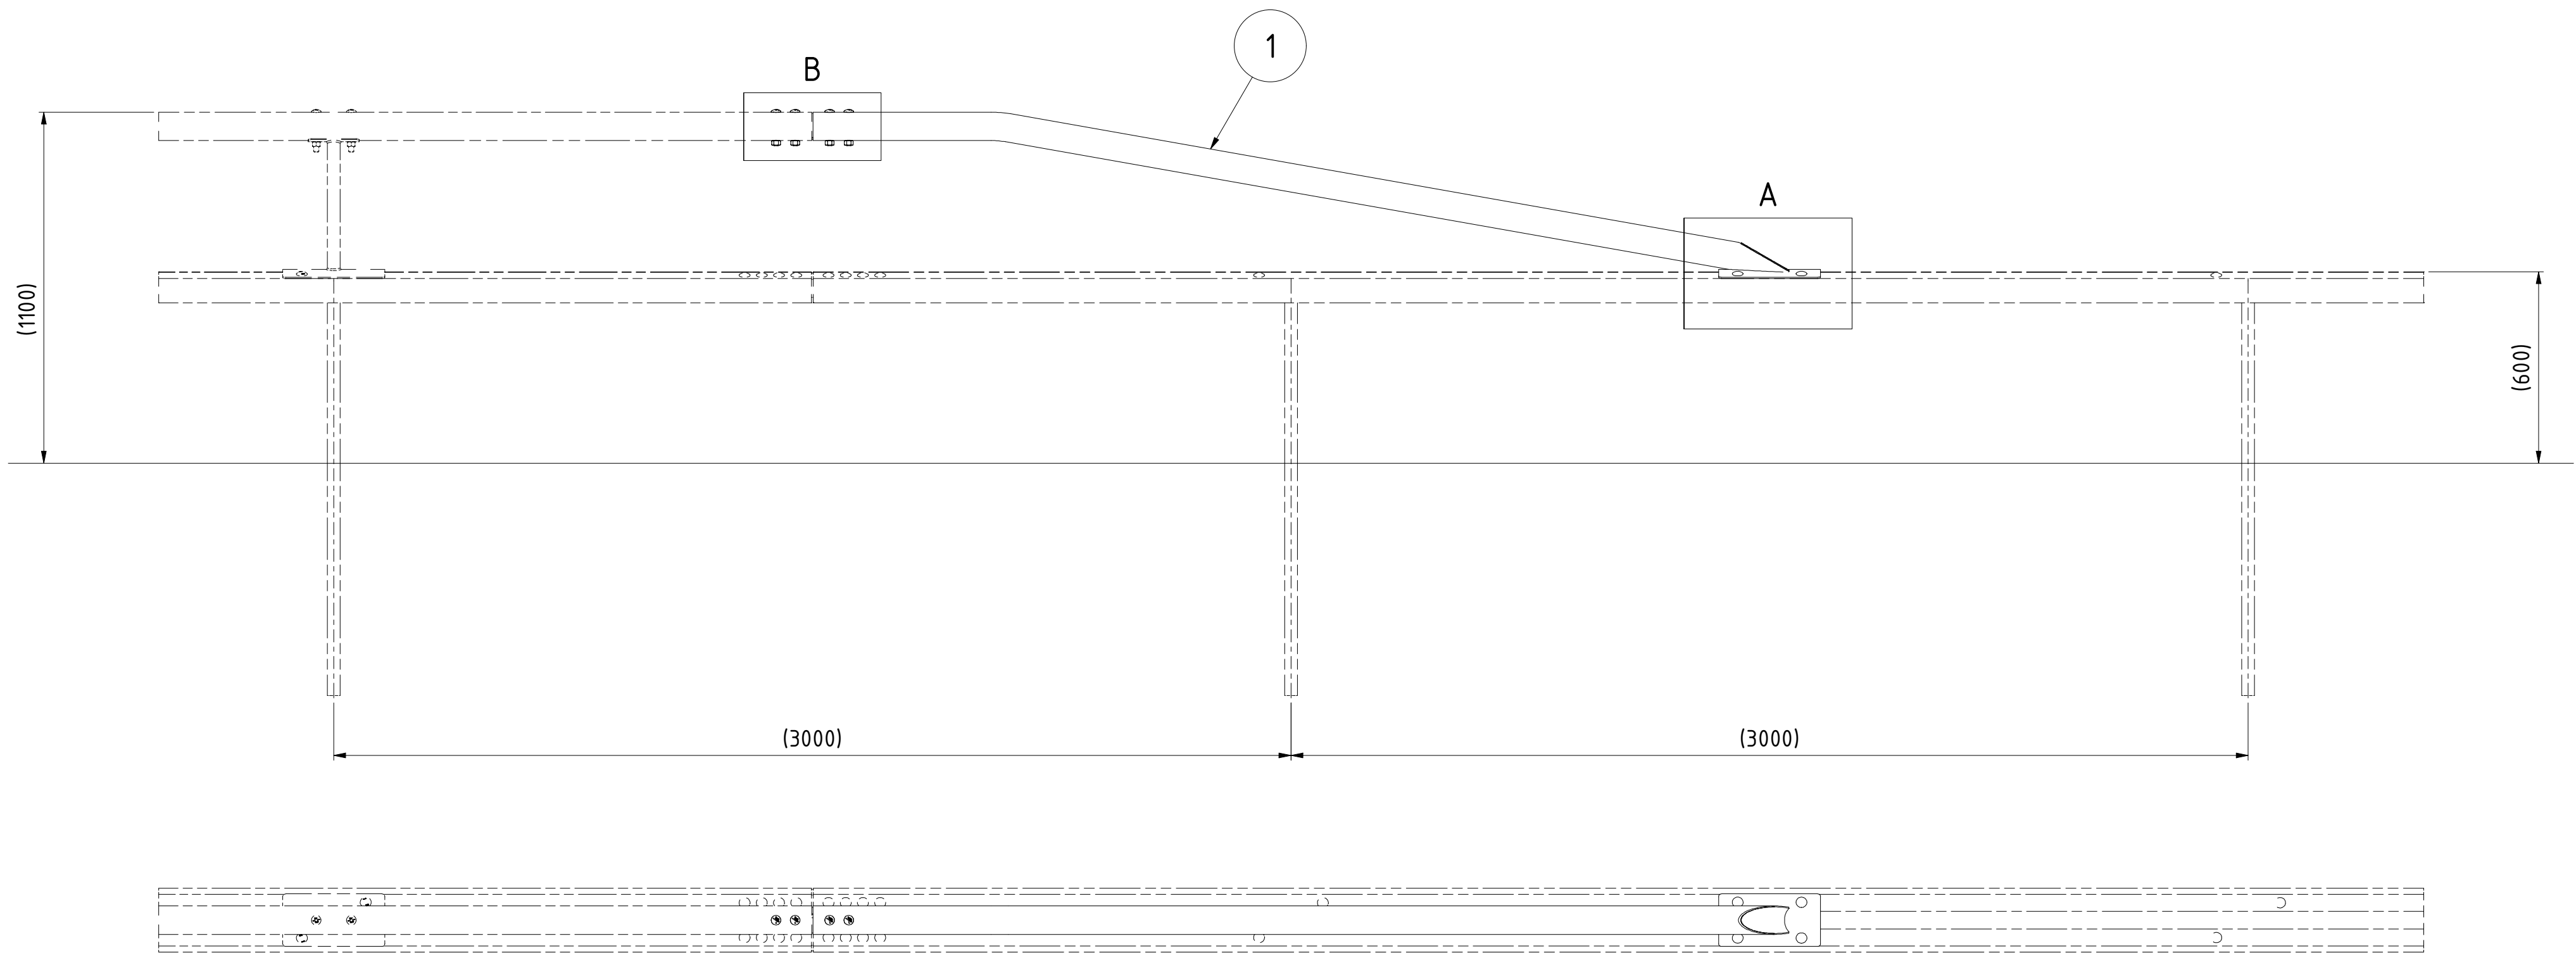


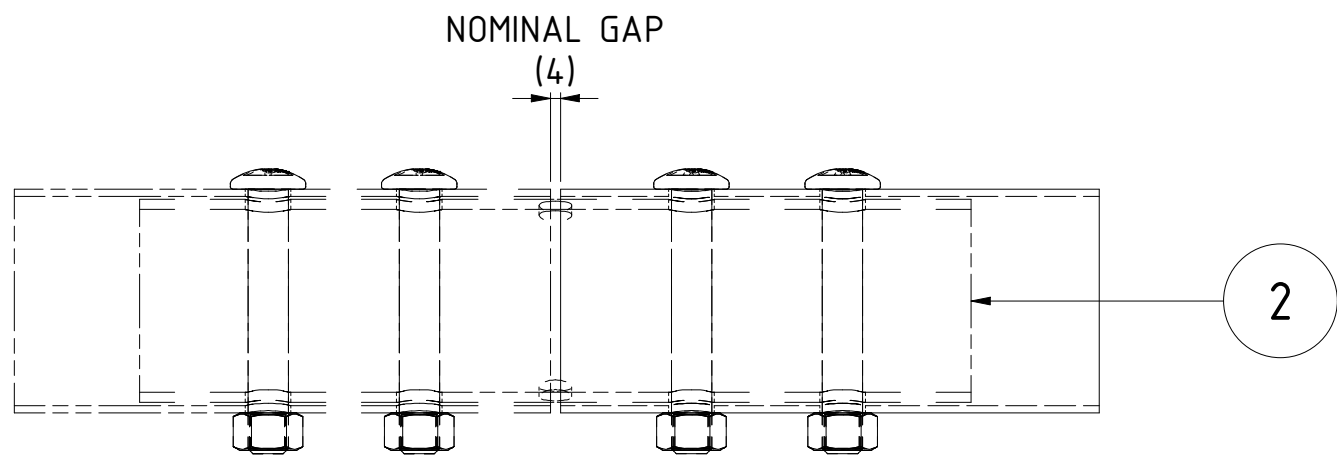

A (1 : 3)

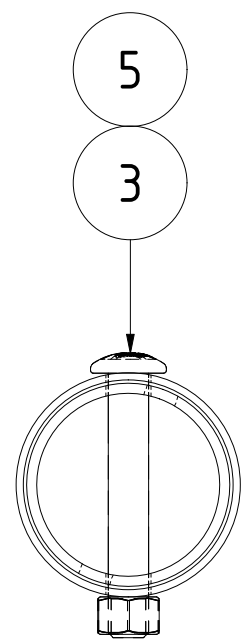

B (1 : 3)

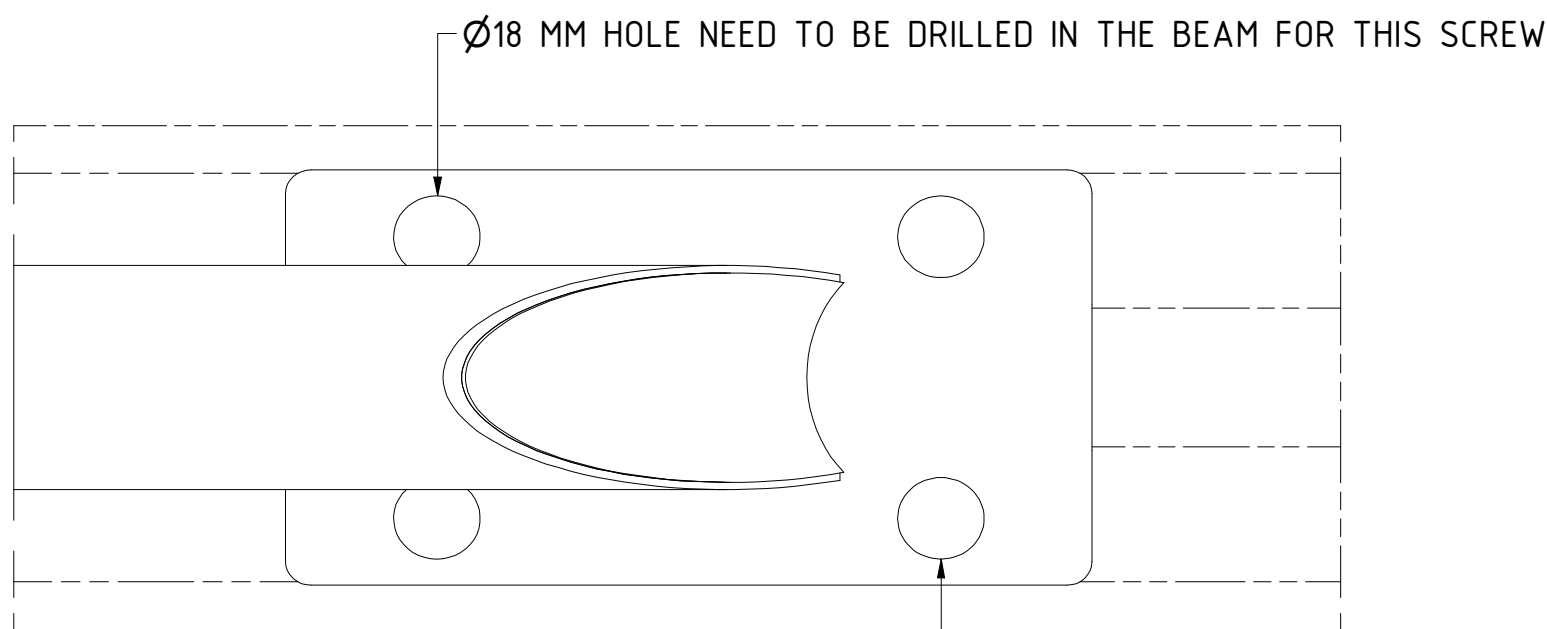

Ø18 MM HOLE NEED TO BE DRILLED IN THE BEAM FOR THIS SCREW

CORROSION PROTECTION

HOT DIP GALVANIZING IN ACC. WITH SS-EN ISO 1461, NA. 1, Fe/Zn 115
SCREWS AND NUTS HOT DIP GALVANIZED IN ACC. WITH EN ISO 10648
WASHERS HOT DIP GALVANIZED IN ACC. WITH SS-EN ISO 1461, TABLE 3

PARTS LIST				
ITEM	QTY	DESCRIPTION	DIMENSION	NOTE
1	1	HAND RAIL TERMINAL		839391
2	1	JOINT TUBE	80,6x4	60570
3	4	MUSHROOM HEAD BOLT 8.8	M16x105	11221610500
4	4	MUSHROOM HEAD SCREW 8.8	M16x30	61769
5	4	NUT M6M 8	M16	1123160000
6	4	NUT M6MF 8	M16	692316000

ADDITIONAL INFORMATION

THE HAND RAIL TERMINAL IS SYMMETRICALLY DESIGNED TO FIT BOTH ON & OFF.

GALVANIZATION DAMAGES FROM DRILLING SHALL BE REPAIRED IN ACCORDANCE WITH THE VEHICLE RESTRAINT SYSTEM INSTALLATION MANUAL.

DRAWING TYPE INSTALLATION		DRAWING STATUS Released		
		DESCRIPTION SAFELINE-M CC3, PEDESTRIAN ATTACHMENT, HAND RAIL TERMINAL, ON AND OFF		
		PROJECT MANAGER -	PROJECT NO. -	
CREATED BY SNR	CHECKED BY DLT	ASSIGNMENT NO. -	CONSTRUCTION NO. -	
APPROVED BY DLT	DATE 2026-01-15	SCALE -	DRAWING NO. 839391A	REV -